

OUTDOOR LED SCREEN

PROJECTS INSTALLTION,
USER FRIENDLY




Parameter

	DIOS LED-9.0-OD	DIOS LED-7.5-OD	DIOS LED-5.6-OD	DIOS LED-4.5-OD	DIOS LED-3.7-OD
Pixel pitch	9mm	7,5mm	5,625mm	4,5mm	3,75mm
Weight	7,5kg	7,5kg	7,5 kg	7,5kg	7,5kg
Brightness	6500nits	6500nits	6500nits	6500 nits	6500 nits
Panel Dimension(mm)	360 X 720	360 x 720	360 x 720	360x720	360 x 720
Matrix Configurati-on (px)	40 X 80	48 x 96	64 x 128	80X160	96 x 192
Installing Access	Front / Back	Front / Back	Front Back	Front / Back	Front / Back
Viewing Angle	140 x 120	140 x 120	140 X 120	140 x 120	140 x 120
Grey Scale	65536	65536	65536	65536	65536
Refresh Rate	>2880 Hz	>2880Hz	>2880Hz	>2880Hz	>2880 Hz
Power consumption	208W	231W	234W	239W	247W
Av. Consumption	62W	69W	70W	72W	74W
Voltage	110V / 220V 50/60Hz	110V / 220V 50/60Hz	110V / 220V 50/60Hz	110V / 220V 50/60Hz	110 / 220V 50/60Hz
Protection Grade	IP66	IP66	IP66	IP66	IP66



Thickness: 13mm
Aviation Connector
Blue: Data | Yellow: Power

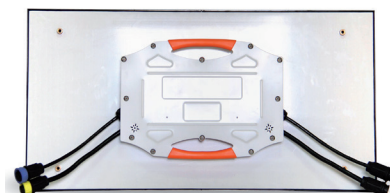

OUTDOOR LED SCREEN

PROJECTS INSTALLTION,
USER FRIENDLY



Referenzen



Pylon für Waschstraße



Industriewegweiser



Firmenschild



LED-Container